



△ Cable orientation on bottom

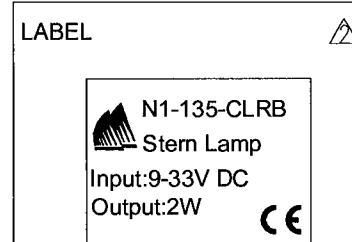

|                       |  |
|-----------------------|--|
| Rating                | 9-33V DC Multi-Voltage                 |
| Amps                  | 0.14Amps@12V                           |
| Insulation Resistance | DC 500V 100M ohm min.                  |
| Operating Temp        | -20°~+60°C                             |
| LED Lamp Type         | 1W x 2PCS                              |
| Type Approval         | IP 67<br>EMC EN55022<br>USCG ABYC A-16 |
| LED Lifespan          | 50,000 Hours                           |

-Minimum Visible Distance: 2 Nautical Miles  
(Yachts and Powerboats)  
View Angle:135°



Material:  
-Housing: PC, Black  
-Lens: PMMA, Clear  
-Installation: White, PVC, 2.0M

**LED Navigation Lamp**  
USCG Approval 33 CFR 183.810.  
Meets ABYC A-16.  
Tested by Imanna Lab., Inc. 1018  
MARINEBEAM